



10/5289039
PCT/GB 2003/004039



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 24 FEB 2004
WIPO PCT


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C., or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

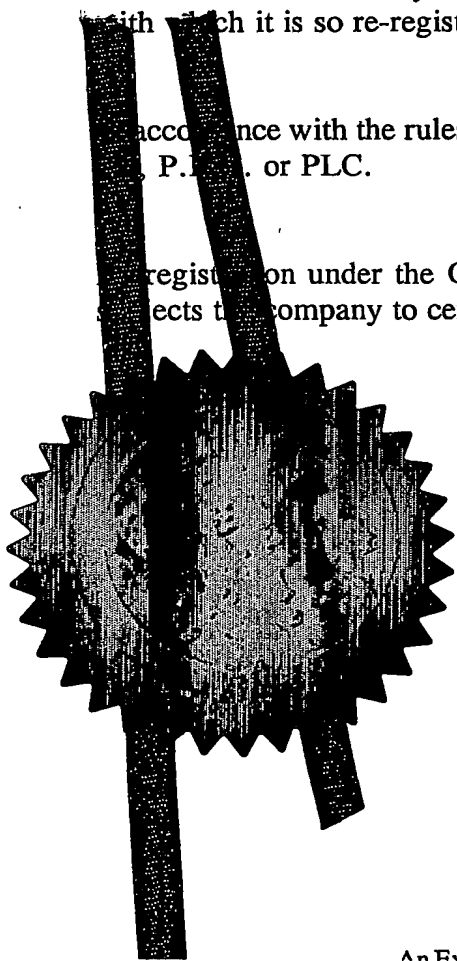

Signed 

Dated 4 February 2004

Patents Form 1/77

Patents Act 1977
(Rule 16)23SEP02 1750332-2 000318
P01/7700 0.00-0222041.6THE PATENT OFFICE
A**Request for grant of a patent** 23 SEP 2002

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

RECEIVED BY FAX

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your

AJL/IR/P5090

2. Patent application

(The Patent Office will fill in this)

0222041.6

23 SEP 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)Baby Innovations and Marketing Servicios Internacionais SA
3rd Floor, 38 Esplanade
St. Helier, Jersey
Channel Islands, JE4 8QL

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Madeira

8469561001

4. Title of the invention

Feed and Drink Bottles for Babies

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ROYSTONS

Tower Building,
Water Street,
Liverpool L3 1BA
Merseyside.

Patents ADP number (if you know it)

1438001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

9 /

Claim(s)

Abstract

Drawing(s)

3 /

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

ROYSTONS - Authorised Agents

Date

23-09-2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. A.J. Lyons - 0151-236 5147/1417

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Title: Feed and drink bottles for babies

Description

This invention relates to feed and drink bottles for babies.

Feed bottles for babies generally comprise a container for the milk or other nutrient liquid (feed); a (natural or synthetic) rubber teat for the mouth of the container, and a screw-threaded cap to fit on the mouth to retain the teat in position. To ensure that a baby's feed is not contaminated, it is usual to sterilize the bottle before use, as by cleaning the bottle in a sterilizing liquid or using a steam sterilizer. The same needs to be done with the teat and the cap of the bottle, to ensure their sterility. However, sterilization, or even thorough cleaning of a baby's bottle, may be over looked, or carried out inadequately, causing the feed to become contaminated.

DE 2358128B discloses a bottle closure device and a complementarily formed bottle top for the sterile dispensing of flowable and/or pasty or viscous, sterile bottle contents, particularly of baby food, whereby the bottle top or its opening provided for the discharge of the contents, respectively, is covered under sterile conditions by a cover or closure wall, and said device being adapted to be attached to said bottle top and including on its inner face cutting means for the opening of said bottle, threads for threading onto the bottle top provided with complementary threads and for the simultaneous actuation of said cutting means, as well as means for the sterile dispensing or removal of the bottle contents after the opening of said bottle.

EP 0300786A discloses a one-piece combined feeding teat and cap assembly in which the mouthpiece is molded from a flexible material such as thermoplastic rubber and attached to the cap, which is molded from a different rigid material such as polypropylene. The cap can either make a snap fit or a screw fit onto a container. A method of manufacturing the one-piece combined feeding teat and cap of the invention is also disclosed.

According to one aspect of the present invention, there is provided disposable, preferably aseptic, bottles intended for a single-use only. This is achieved by ensuring that the closure of the bottle cannot be removed once it has been fitted fully in place. One such method of doing this is disclosed in EP-A-0819417, which shows a wide-mouthed bottle body having a closure snap-fitted to it, the closure nipping the periphery of a wide flange on a teat between itself and the mouth of the body. After it has been fitted, the closure cannot be removed because a curved flange on the closure denies the user access to the rim of the closure.

This known bottle suffers from serious disadvantages. One is that the bottle cannot be manufactured by known techniques, because of the reentrant angles in both the body and the flange. Even were this difficulty to be overcome, another disadvantage is that the complicated construction of the bottle would make it extremely expensive to manufacture, thus militating against users being prepared to pay so much for a single use bottle. Another disadvantage arises from the fact that the closure has to be pushed home by the user. It is inevitable that a flustered mother would sometimes push only part of the closure rim over the latching shoulder over the latching shoulder on the body, leaving the rest of the closure canted at a slight angle, which

3

would prevent the bottle from being fluid-tight. She could be misled by the noise into thinking the closure was fully home, when only part of it was. This known 'theoretical' invention also is potentially dangerous to the baby, because a baby could pull the end of the teat so hard that its flange ceases to be clamped between the closure and the body, enabling the baby to pull the teat out of the bottle converting the teat into a potentially-lethal object which could suffocate the baby by becoming lodged in its windpipe. In addition, it may be possible with this bottle for the baby to deform the bottle immediately below the closure to an extent such that the fluid seal between the body and closure is broken, leading to a leakage of the liquid from the bottle, which could prove dangerous to a feeding infant.

An object of the present invention is to provide a baby feeding bottle that may be provided in stackable form.

A second object of this invention is to provide a baby feeding bottle in improved sterile condition, especially for single use.

According to one aspect of the present invention there is provided a baby feeding bottle provided in stackable form.

Preferably, the bottle comprises components that are stackable in sets of the components. For example, a bottle comprising a container body and a closure therefor, might be provided as a stack of container bodies one within the other and a stack of closures on top of each other. The closure component will preferably include a teat for the bottle. The teat may be a separable component, for which means for locking it in place may be included, such as a locking ring to clamp a flange of the teat between the closure and the ring. Alternatively, the teat may be bonded or co-molded to

the closure. Another form of bottle according to this aspect of the invention may have the teat attached to one end of the container body in any suitable way, including those just mentioned and a closure attachable to the opposite end of the body.

A cap may be provided for protecting the teat. The cap is preferably a press-fit over the teat onto the closure or sides of the body.

The closure may be a screw cap. The closure for the bottle is preferably non-removable once the bottle has been filled. A ratchet mechanism may be used, such as disclosed in our earlier patent application GB 2334518A. Alternatively, the closure may be a snap-fit onto the body and a formation may be provided on the body to inhibit removal of the closure, such as a rib or the like to inhibit levering off of the closure. The rib preferably extends outwards to be substantially coterminous with the outer extent of the closure. The closure is preferably adapted or arranged to form a fluid tight seal with the container body.

According to a second aspect of the invention there is provided a baby feeding bottle comprising a container body and a closure therefor, wherein the container body before use has a cover protecting the interior thereof.

The invention further provides a container body for a baby feeding bottle, wherein the container body before use has a cover protecting the interior thereof.

The cover preferably extends into the container body, whereby container bodies are stackable one within the other. The cover is preferably adhered to the rim of the container body at its open end.

The cover is preferably made of flexible plastics material and is

preferably non-stick relative to the material of the container bodies. A suitable cover material may be polystyrene.

Preferably baby feed bottles of the second aspect of the invention are also baby feed bottles of the first aspect of the invention.

This invention will now be further described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a babies feeding bottle of the invention;

Figure 2 shows stacking of closures for the bottle of Figure 1;

Figure 3 shows stacking of bodies of the bottle of Figure 1;

Figure 4 shows schematically an alternative stacking system for bodies of the bottle of Figure 1;

Figure 5 shows another baby feeding bottle according to the invention;

Figure 6 shows the bottle of Figure 5 in position for filling;

Figure 7 shows bodies of bottles according to Figure 5 in stacked formation; and

Figure 8 shows the lids for bottles of Figure 5 in stacked form.

Referring to Figures 1 to 3 of the accompanying drawings, a baby feeding bottle 10 comprises a container body 12 with an open top and a closure 14 that is a snap fit over the open end of the body 12. The body 12 has a lip 16 around its top edge and the closure has a rim 18 with an internal lip 20 that is a snap fit over the lip 16 of the container body. Below the lip 16 on the exterior of the container body is an annular rib 22 positioned, so that when the closure is in position, the rib interferes with attempts to re-open the bottle, so that the bottle is suitable for single usage prior to disposal for recycling.

6

The closure 14 has an internal depending annular wall 24 to form a seal against the inner surface of the container body, when the closure is in position on the body.

The closure has a generally central opening that has a teat 26 therein. The teat may be a separate item fitted to the closure, may be co-molded with closure or may be otherwise adhered to the closure. In the illustrated embodiment, the teat is held in place between a lip around the central aperture of the closure and a ring 28 pressed into the teat, so that the teat is trapped.

The teat is covered by a cap 30, that is a friction fit on the closure.

The bottle container body is preferably made as a thin-walled injection molding, such as of polypropylene.

The container body and the closure/teat/cap combination are provided in stacks both for ease of packaging and for protection against contamination prior to use. The bottle components are to be packaged in sterile form, such as by means of irradiation. The container bodies are to be provided as a stack 40, such as shown in Figure 2 and the closure/teat/cap combinations as a stack 42 as shown in Figure 3.

In Figure 2, it can be seen that the interior of each container is protected against contamination when being removed from the top of the stack by its close fit over the next container body down in the stack and because only its outer surface needs to be handled before filling. However to improve protection against contamination it is proposed, as shown in Figure 4, to have each individual container body provided with an internal cover 44 that is sealed over the rim of each container body and extends into the

7

container body 12, so as to allow close stacking as in the embodiment of Figure 2 of the drawings. The cover preferably extends at least part way down the outside of the container body, so as to cover an area that will be handled when lifting a container body from a stack thereof. The internal covers may be made of polystyrene film but ideally any material used for the covers will be relatively thin and non-stick. When a container body is to be filled, it is removed from its stack and the internal cover peeled away.

The closure stack as shown in Figure 3 of the drawings has the exterior of surface of each teat protected by its cap and its interior surface protected by the exterior surface of the cap of the underlying closure. Thus, when a closure is required, the top one from the stack is removed the teat of the next closure down remains protected from hand contact.

Both the container body and closure stacks are preferably provided in packs of say 10 or 12, the packs having been sealed and UV irradiated or otherwise sterilized.

Turning to Figures 5 to 8 of the accompanying drawings, there is provided another baby feeding bottle 100 according to the invention. The bottle 100 comprises a container body 102 that is formed open at both ends. Its intended bottom end is closed by a clip-on lid 104 and its intended top end has a teat 106 fitted. The top end of the body has sides turned inwards to form a ledge 108 under which flange 110 of the teat is held by means of a press-fit locking ring 112. The teat may alternatively be co-molded with the container body or adhered thereto by any other suitable means.

The teat 106 is protected by a push-fit cap 114 that locates over the upper sides of the body. The cap 114 is sized so as to depress the teat to a

certain extent to reduce the overall height of the bottle to increase stacking density and the cap is also shaped so as to allow the bottle to be stood upright as shown in Figure of the drawings for filling. The cap has a top surface having a rim 122 and a central part 124 linked by an annular depressed part 126.

The clip-on lid 104 has an internal annular wall 130 sized to fit sealingly within the container body and an annular internal rib 132 that locates over an annular external rib 134 of the container body. It is envisaged that a rib will be provided on the outer surface of the body just above the clip-on lid to inhibit removal thereof once fitted, so that the bottle can become effectively a single-use disposable bottle.

As in the previous embodiment it is intended that the components of the bottle 100 will be provided in stacks that are packaged in a sterile manner. Thus, as shown, the body and teat combinations are stacked inside each other. As with the previous embodiment it is envisaged that the internal surfaces of the body will be protected by internal covers in the same way. The clip-on lids will be stacked on top of each other as shown and each stack will be provided in a sterile package. The packages may be sterilized in any suitable way, such as by electron beam irradiation.

The container body is preferably thermo-formed from say polypropylene. The container body may alternatively be made by injection molding, vacuuming forming or blow molding.

In either of the illustrated embodiments the teats are preferably provided with bleed valves to allow for pressure equalization within the bottles as liquid is sucked out. A bleed valve preferably comprises a hole in

23/09/2002

16:10




ROYSTONS → PO DOC RECEP

NO.515

Ø13

9

the teat flange, wherein the hole has divergent sides from the inner to the outer side of the teat.

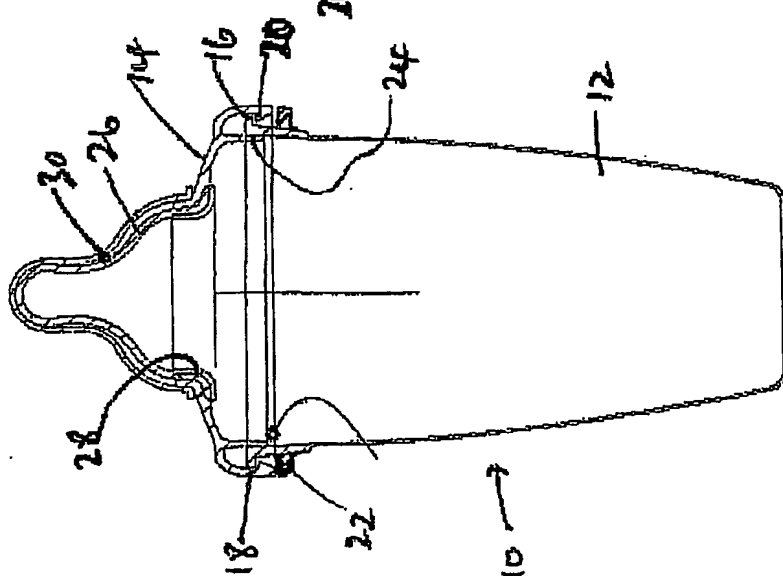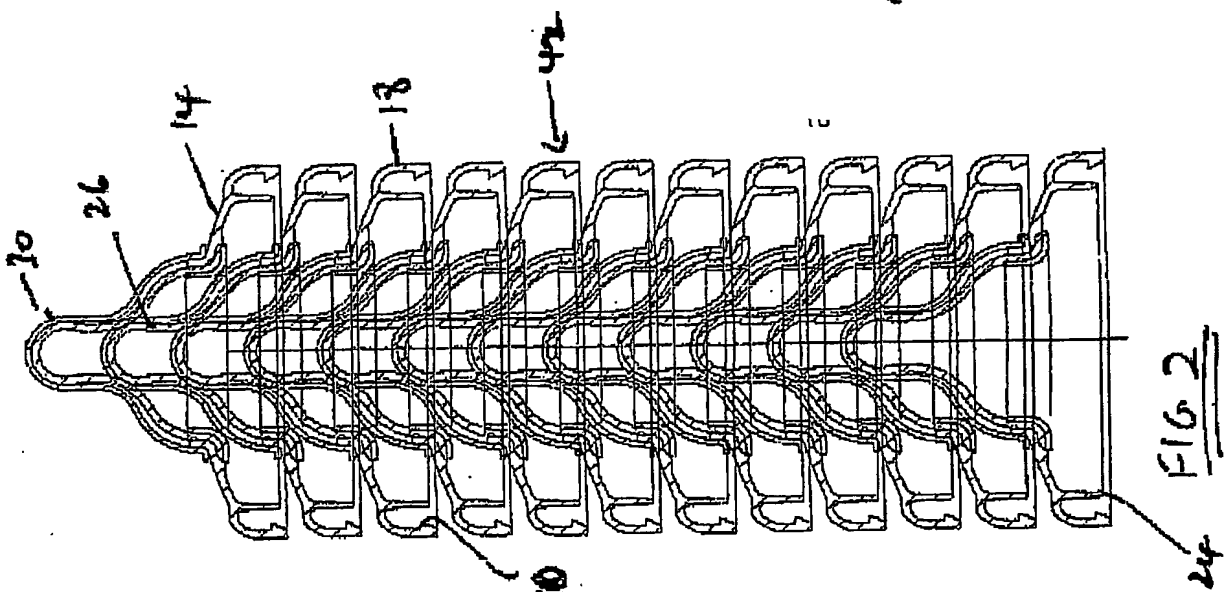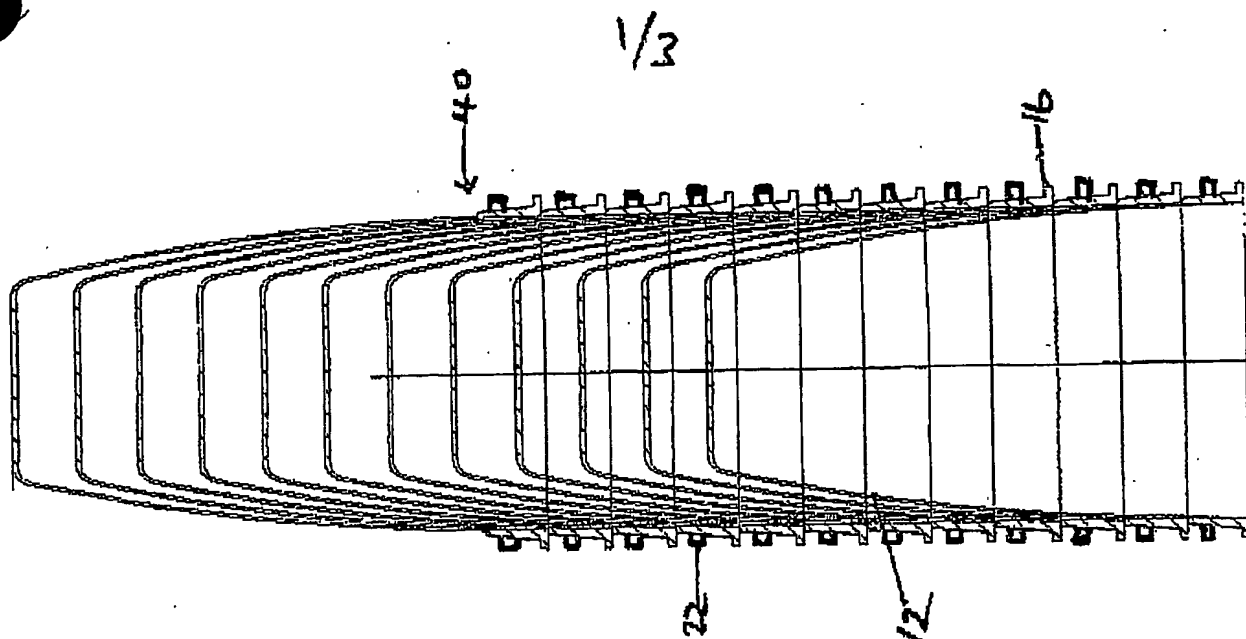

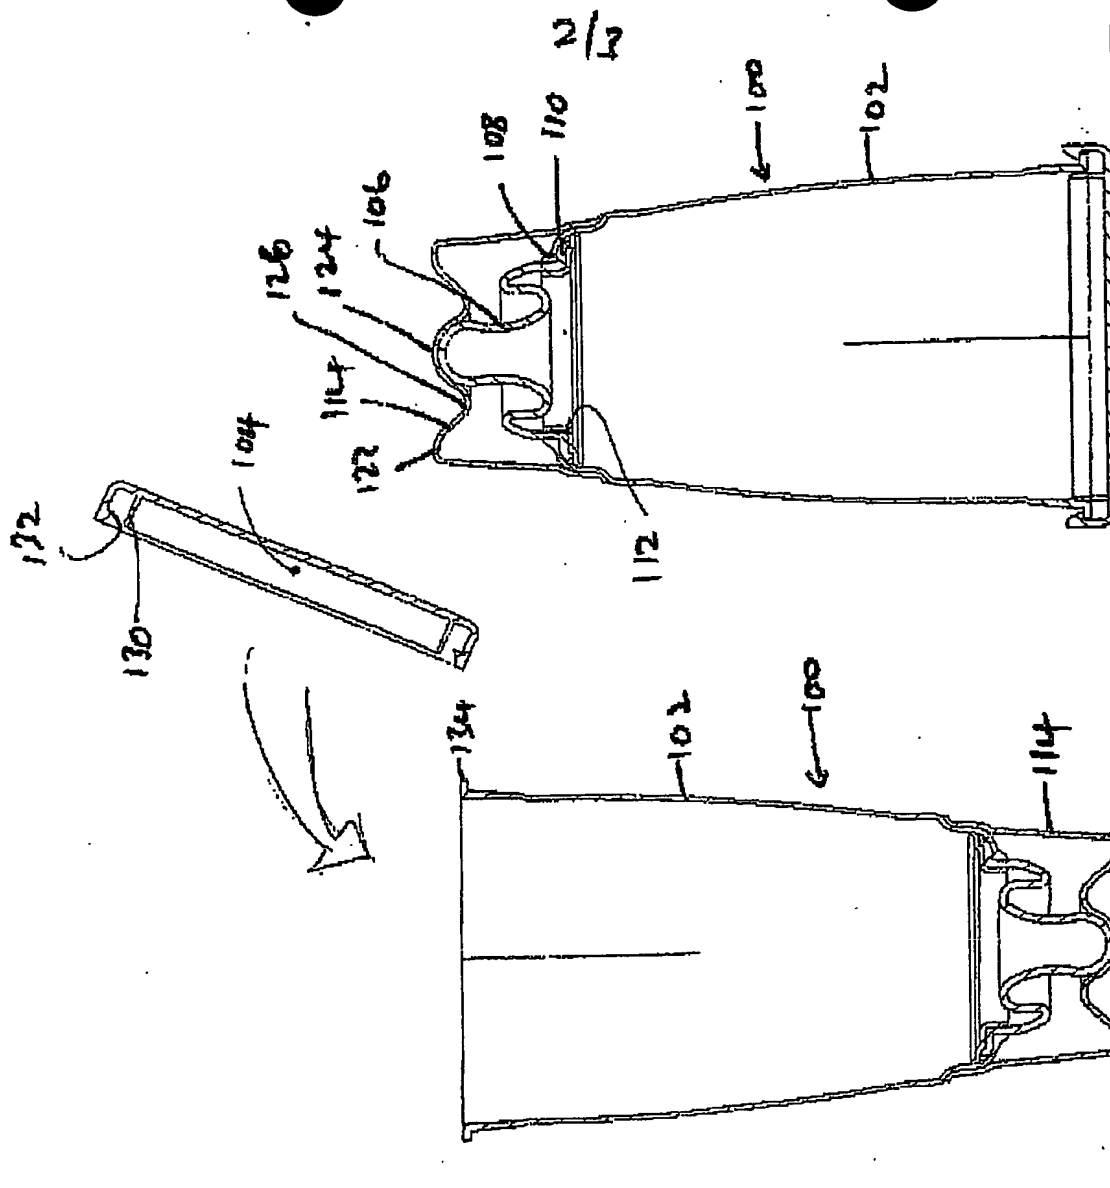


FIG. 5

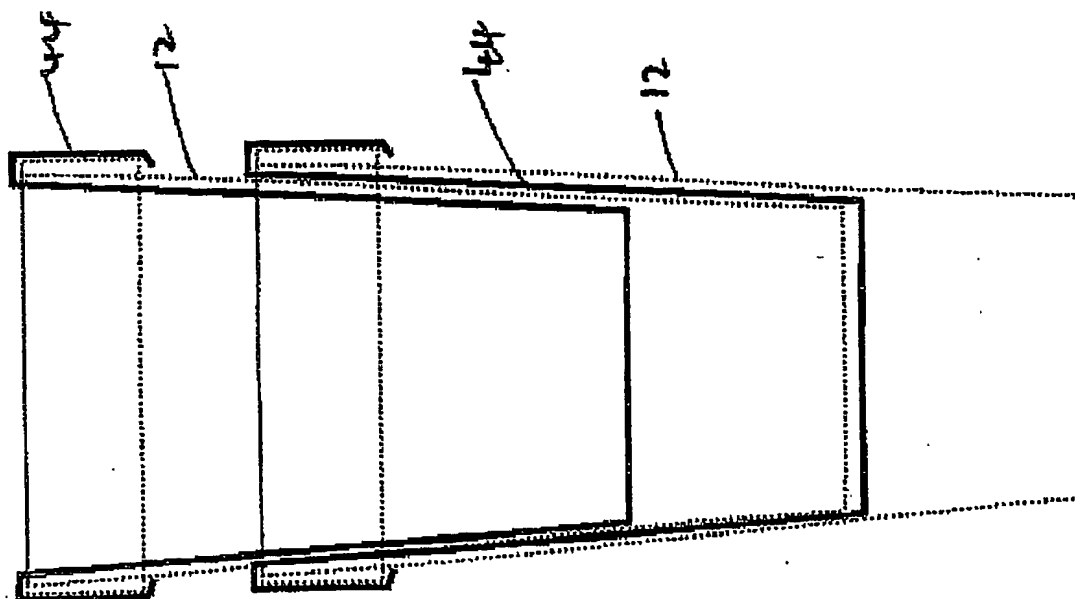
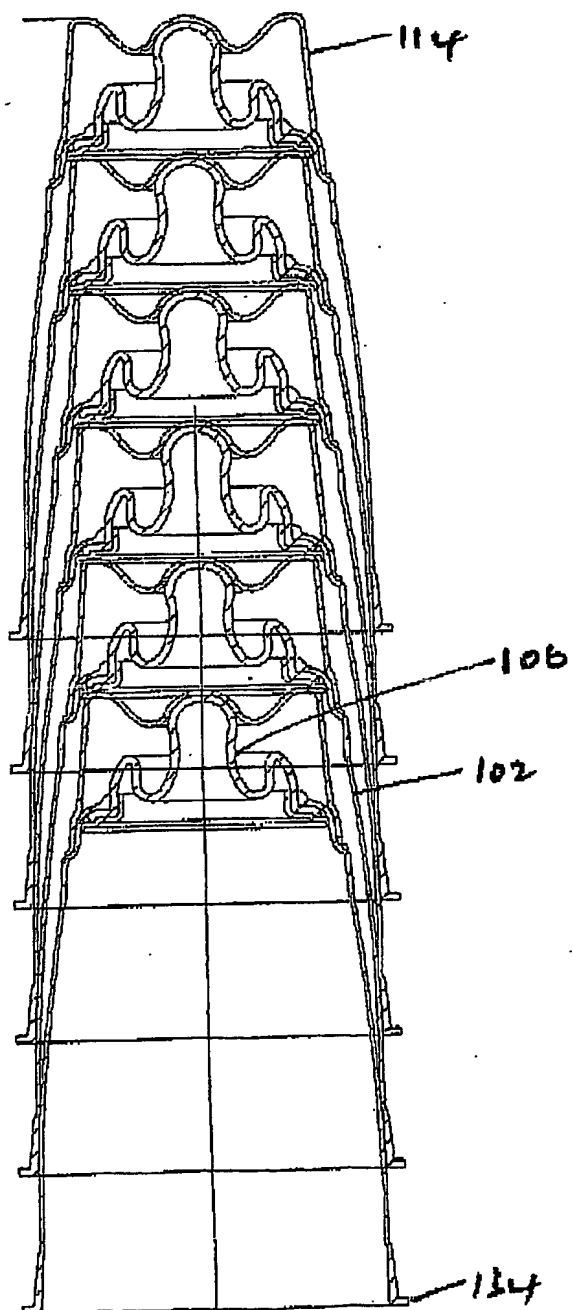
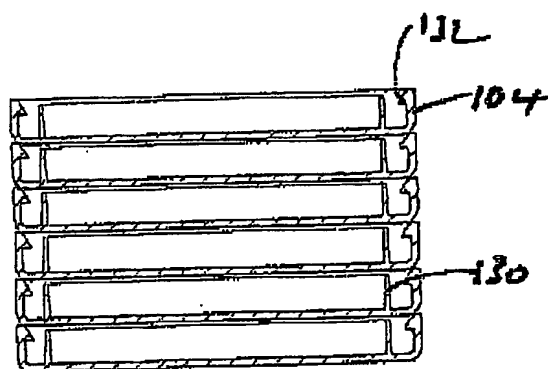


FIG. 4

3/3

FIG. 7.FIG. 8.